



SiTime MEMS Oscillators

Micro Electro Mechanical Systems (MEMS) incorporate nano-technology in the electro-mechanics. Miniaturized mechanical and electro-mechanical elements under the control of integrated micro-electronics are encapsulated into a small vacuum chamber forming complete systems – that is the definition of MEMS. A number of functional elements, like sensors, actuators can be realized as MEMS transducers, devices that convert energy from one form to another. In the case of micro-sensors, the device converts a measured mechanical signal into an electrical signal. The possibilities provided by the MEMS technology by means of downsizing, cost effectiveness of the applied production methods open new areas of usage. One of these areas is the timing with MEMS based resonators that are tiny structures vibrating at high frequencies. This article will give overview through leading manufacturer SiTime's devices and technologies.

Traditional resonators and oscillators

A resonator is such a device that oscillates at some frequencies, called its resonant frequencies, with greater amplitude than at others. These oscillations can be either electromagnetic or mechanical kind by generating waves or select specific frequencies from a signal. The widely used traditional crystal oscillators use the mechanical resonance of a vibrating crystal of piezoelectric material to create an electrical signal with a very precise frequency, which is used as a clock signal for microprocessors or for stabilizing signals for radio frequency systems.

Quartz crystals are manufactured for frequencies from kilohertz to megahertz range. Clocking of digital electronics circuits was not complicated, usually taking a Pierce oscillator driven by the piezoelectric quartz crystal resonator provided an oscillating signal, that – after filtering a dividing down – was usable for most of the timing tasks.

There are also oscillators, which use piezoelectric ceramic resonators inside instead of quartz crystal.

Traditional quartz oscillators require custom machinery to cut, grind, and plate the resonator crystal, and the manufacturers are experts in handling them in order to achieve the required frequency and provide its stability for 20 years. However usually they do not have the expertise in analog electronics, the have to buy the analog die.

If the devices are bought from outside vendors, a lot of extra cost could come up in order to achieve high quality levels. The complexity of the manufacturing process of the oscillators results a higher investment, higher manufacturing costs, longer lead times, and more quality issues.

On the other hand semiconductor-clock manufacturers did not have the experience in the special way of packaging the quartz crystals that require vacuum-sealed ceramic packaging in order to reserve high Q factor. Keeping the two separate package for the resonator and the analog electronics had bad affect on the market need of miniaturization.


MEMS resonators - SiTime

Space saving in the PCB design



Conventional solution


Resonator is integrated in the IC package



Embedded solution

For the past several decades, quartz crystal based oscillators, clock generators and resonators were the primary reference timing components in electronics, since there were no real alternatives. Recently a new technology rose up, offering the first devices where the MEMS structures are built in the same package with the analog circuitry.


MEMS resonators are connected to the MEMS-specific circuit blocks on the

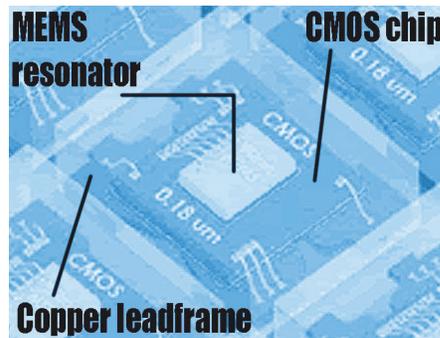

analog IC and are driven through electrostatic excitation.

A MEMS bias generator is used to bias the electrostatic transducers that are built in the MEMS die. The resonator sustaining circuit brings the resonator into mechanical oscillation that is sensed, and the analog oscillator die can provide multiple clock outputs from a single, compact semiconductor package.

SiTime, an analog semiconductor company, whose MEMS technology has roots in Bosch and Stanford University, offers solutions that are replacing traditional quartz crystal based oscillator products by offering higher performance

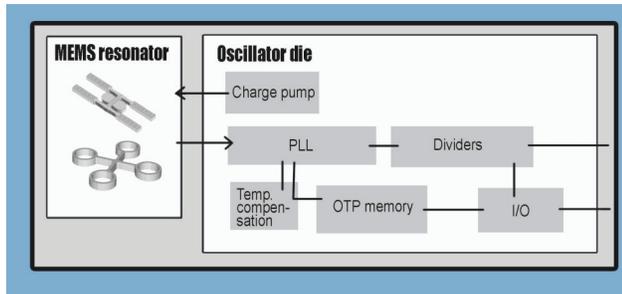

provides temperature compensation – to minimize the frequency drift as temperature changes –, output drivers and one-time programmable memory. SiTime has been able to

and reliability at a lower cost.

SiTime has introduced a combo chip solution that stacks the MEMS structure on top of standard CMOS dice to supply all their timing signals.

A key advantage is the ability of the MEMS chip to set up as factory default several clock frequencies on a single chip.

The combined MEMS-CMOS solution offers significant benefits such as smaller footprint and less complex chips. Their products are supported by factory programmability, and offer drop-in replacements for quartz oscillators without any design changes.

The programmable architecture enables flexible product design and fast lead-times, offering in the same time downsizing, with up to 85% space reduction. Designers may also order Time Machine II programmer to program SiTime oscillators in their own facility to quickly develop prototypes.

SiTime combined the MEMS and analog electronics on a single die, therefore no need to package the resonator and the analog electronics separately.

As seen on the figure, the device

design kilohertz devices with jitter as low as 500 fs, stability as low as 0.1 ppm, and very low (700 nA) power consumption.

Programmable parameters include e.g. rise and fall times to reduce EMI, improve jitter, or drive any kind of loads; frequency to six decimals of accuracy; and stability, temperature, and signaling level (LVPECL or LVDS).

Benefits of MEMS resonators vs. conventional crystal oscillators

The biggest enemy of MEMS oscillators is moisture, which can condense on the tiny resonator during operation, causing changing its frequency. The "MEMS-first" process solves that problem by sealing the MEMS cavity in silicon at extremely high temperatures, making it impossible for moisture or stray gases to be sealed in.

"MEMS-last" process technique waits until the very last step to put a glass cap on a wafer



at relatively low temperatures. Bosch and SiTime are considered to be the only two MEMS fabricators using the MEMS-first approach.

Till today, the strongest argument to stay with conventional quartz resonators was their low price and predictable temperature stability (see red curve on the figure).

A MEMS resonator's characteristic is typically nearly a vertical line, so for the oscillators based on these kinds of resonators the temperature compensation circuitry is a must to have feature.

Originally SiTIME's MEMS resonators had 30 ppm/°C frequency stability variation, which is in fact 4000 ppm over the whole operational temperature range of -40 – 85°C before temperature compensation in the analog electronics reduced this to 0.1 ppm, while conventional quartzes usually achieve 0,4 ppm/°C. The newest TempFlat MEMS devices differ from previous MEMS oscillators, as they are the first MEMS resonators that natively outperform quartz resonators without temperature compensation circuitry.

The characteristics shown on the figure is based on real measurement. The figure below compares quartz oscillators with SiTime's Silicon MEMS timing devices. Customers can order any combination of frequencies, voltages and frequency stabilities (PPM) in a range of industry-standard packages.

SiTime oscillators offer any frequency within the operating range with up to 6 decimal places of accuracy. With custom frequencies, designers can increase system performance (microprocessor / FPGA applications) and reduce bit error rates (Ethernet applications).

Because the devices are made with standard CMOS silicon techniques, they are easier and cheaper to manufacture than crystal oscillators, that require special producing and packaging techniques.

As the manufacturing process involves fewer participants, the costs are minimized, as well as the time to first sample. Customer benefits not only from the lower price, but also the lower lead-time makes it possible to reduce the investment costs. As MEMS devices offer more features (e.g. programmability), design costs are also less. As reliability is higher, the end product will be of a high brand value.

SiTime highlights


RFbeam Microwave is a leading supplier of planar Radar sensors, K-band measuring equipment and engineering services. The company usually offers radar transceivers, which are devices SiT15xx series oscillators are the smallest available ones for 32 kHz timing applications. They combine a MEMS resonator with a fractional-N PLL synthesizer and different dividers to

provide frequency from 1 Hz to 32,768 kHz.

The small 1.5X0.8x0.55 mm package parts have a 100 ppm stability, low (0.75uA) consumption and very good shock and vibration resistance. There are family members that are fixed frequency devices (32,768 kHz), others are frequency programmable, and operate from 1.2 to 3.6V or 2.7-4.5V supplies, respectively.

The first oscillator introduced in 2008 is the lowest jitter programmable oscillator aiming SATA, Fiberchannel, Firewire, Ethernet and PCI Express markets. The SiT8003XT is the thinnest

programmable oscillator with typical 250 microns height. This product targets the portable application field, such as smartcards, Flash storage devices and cellular phones.

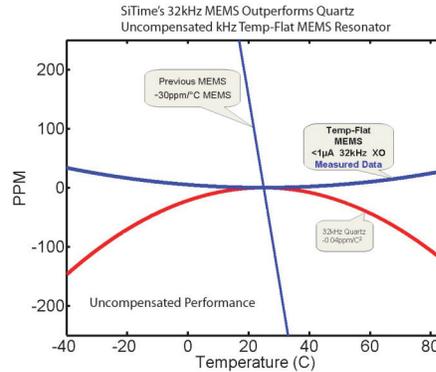

Advantages of Silicon MEMS Oscillators

	Quartz Oscillator	SiTime Semiconductor Oscillator	
Performance	██████	██████	Better Stability, Aging No Activity Dips
Features	██████	██████	Programmable Silicon
Availability	██████	██████	Samples – 48 hrs Production – 3 weeks
Reliability	██████	██████	Up to 20x Better
Size	██████	██████	Up to 80% Smaller
SOC Integration	██████	██████	Quartz can't be Integrated